




This traditional battery charger can charge 12V and 24V lead-acid or calcium batteries for small cars, vans and agricultural vehicles.

- To charge lead acid batteries with liquid electrolyte:
 - 12V: from 25 to 160 Ah
 - 24V: from 15 to 90 Ah
- Ammeter to indicate the charge
- 2 charge speeds: Normal and "Boost".



- Copper wound transformer
- Clamp cables 1.5m
- Power supply cable 1.3m

TECHNOLOGY

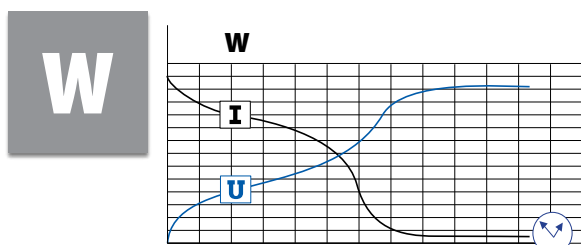

GENERAL PROTECTION



- Thermal protection of the transformer
- Protection against polarity reversal with a 15A automotive fuse at the front.
- Isolated clamps
- Metallic casing

CE - EN 60335-2-29

50-60hz	190W	12V	2	13.5A	Moyen/Average (EN 60335)		fuse	cm	kg
					Reg 1	Reg 2			
230V	190W	12V	2	13.5A	7A	9A	15A	20.5x30x13.5	3.9
		24V	2	7.5A	3A	5A			

Made in China

www.gys.fr