

Set of 2 XL ramps

Ref. 082717

With a maximum load capacity of 3500 kg per set, each pair of vehicle access ramps is extremely robust. They are ideal for minor servicing or maintenance operations under a vehicle.


- Compatible with most vehicles: cars, commercial vehicles, etc.
- Very strong, UV-resistant HDPE plastic material.
- Easy to use, no assembly required.
- Slip-resistant with 4 rubber pads.
- Max. wheel width: 235 mm
- Lifting height: 160 mm.
- Slope: 20°.



✓ Tesla Model 3
Ground clearance: 138 mm




✓ Mazda CX5
Ground clearance: 210 mm

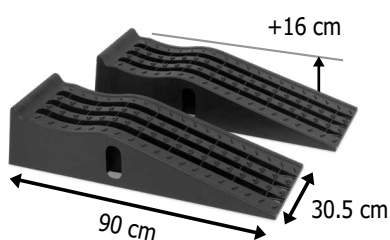

Tyre support safety rim

Curved profile

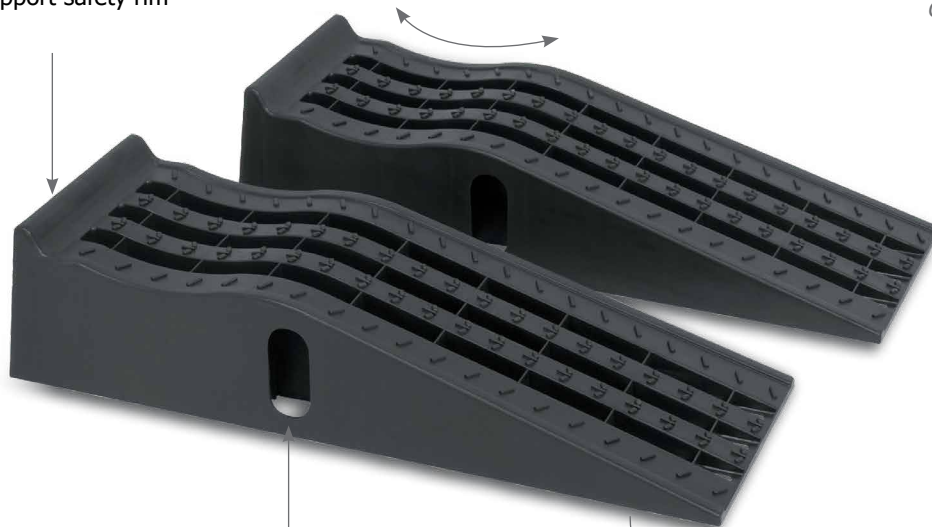




Carrying handle

Non-slip, free-draining surface

High stability with 4 rubber feet



 max	 kg	 a x b x c
3.5 T	10	350 x 325 920 mm